WHAT WE CAST IS MADE TO LAST

THE PRECAST EXPERTS

Infracast has been manufacturing high-quality precast products from the heart of Eswatini's industrial hub, Matsapha, for more than 30 years. Our commitment to maintaining the highest standards of innovation, quality and services has driven our contribution to infrastructure developments within the kingdom and beyond borders.

We've never let a client down.

We always honour our commitment of delivering quality products and service .

WHAT MAKES US DIFFERENT

Technology-supported products.

We invest in best-of-breed technology, which is key to producing effective products designed for longevity and performance.

Quality guaranteed.

All our products are manufactured to stringent quality standards in accordance with SANS 986:2019, SANS 1294:2020 and SANS 687:2020 and our factories are all SABS approved.

Safety first.

We place significant emphasis on safety both in the work place and application of our products.

CONTACT US FOR QUOTATIONS:

sales@infracast.co.sz +268 2518 4562



Get in touch with us:

info@infracast |

+268 2518 5542 |

www.infracast.africa

www.infracast.africa







PRODUCT CATALOGUE

CONCRETE SEWER PIPE (SPIGOT AND SOCKET)

Used for conveyance of sewage, or sewage and surface water.



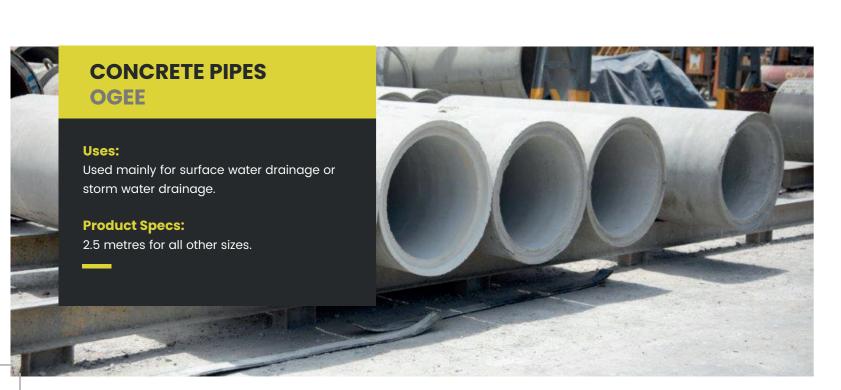

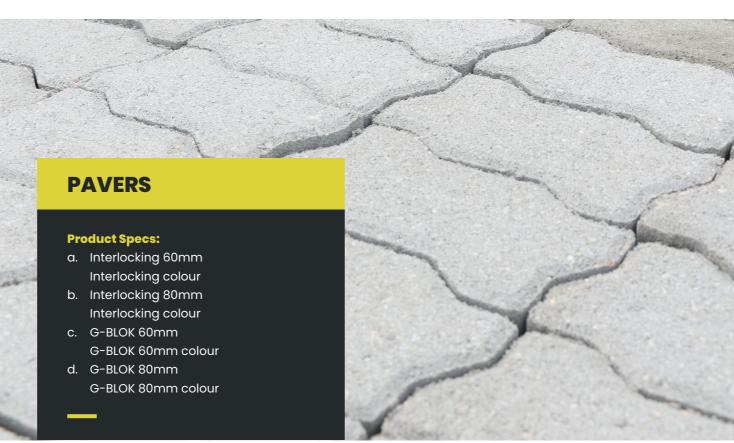



Manhole sections are supplied in lengths of 1000mmm, 500mmm and 250mmm. They are available in diameters of 750mm, 1000mm, 1250mm, 1500mm and 1750mm.

Supplied with or without steps.



NEW JERSEY BARRIERS

BUILDING

blocks, 4.5" inch blocks.

BLOCKS

Concrete new jersey barriers (traffic barriers) are designed for any commercial or industrial situation or environment. Supplied at 6m lengths. Special end block units supplied at 2.5m

Available sizes: 9" inch blocks, 6" inch

4.5" Dimensions: Width=115mm

Length=450mm Height=230mm

6" Dimensions: Width=150mm Length=450mm Height=230mm

9" Dimensions: Width=230mm


Length=450mm Height=230mm



ROOF TILES

Product Specs:

- a. Double Roman Standard
- b. Round Ridge
- c. V Ridge
- d. Rake Ridge
- e. Round Hip Starter

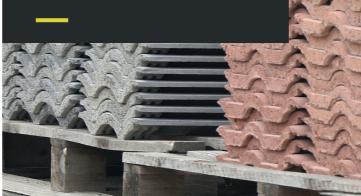

PORTAL CULVERTS

Product Specs:

Culverts are supplied in 1,2m lengths and in 150S, 175S and 200S strength classes. Special strength designs can be accommodated.

The standard culvert sizes range from a span of 450mm to 3600mm, and from a height of 300mm to 3000mm.

KERBSTONES (MOUNTABLE KERBS)

Available Kerbs: Fig. 3 Kerbs, Fig. 7 and Fig. Bc. to 1000mm.

